

1 2 3 4 5 6 7 8 9 10

A

B

C

D

E



F

G

H

I

J

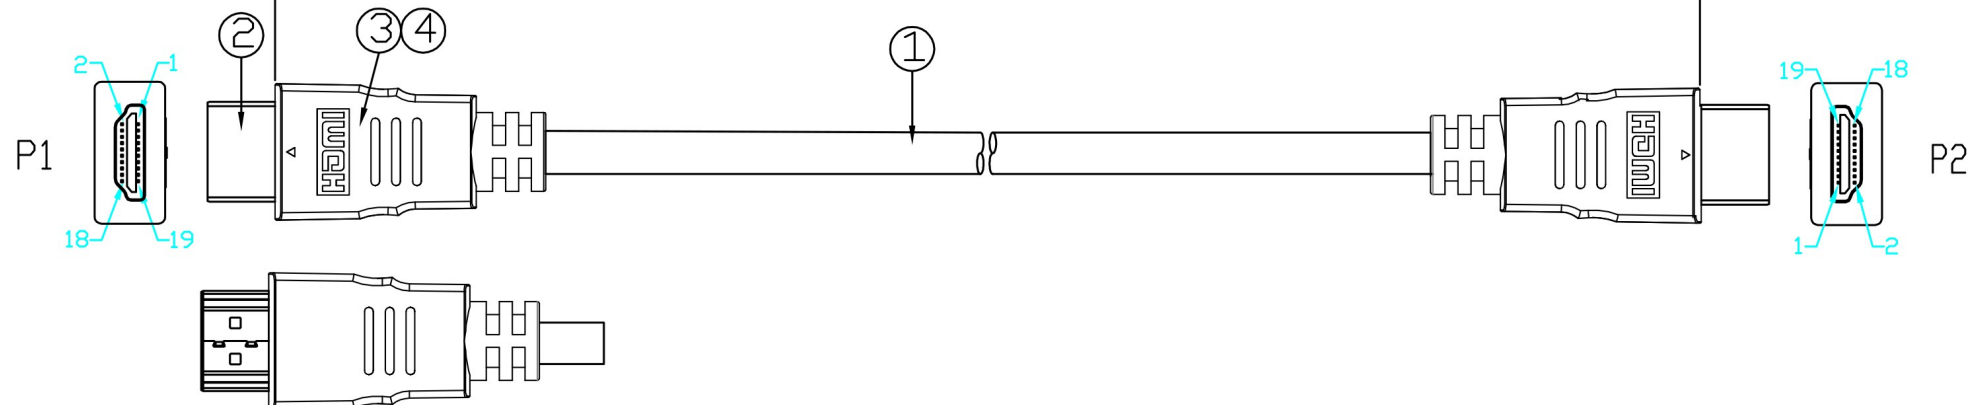


AL-MY
Insulation:5Pair FPE
Conductor:5Cx30AWG(7/0.10BCx1Pair)
Drain:30AWG(7/0.10BC)
Conductor:4Cx30AWG(7/0.10BC)
Insulation:4C HDPE
Drain:30AWG(7/0.10BC)
AL-MY
Braiding:16/5/0.12Al-Mg,Coverage rate 85%
Jacket:Flexible PVC, Black Color, $\Phi 6.0 \pm 0.2$ mm

NOTES:

- 1:100% short,open and miss wire test.
- 2:Insulation resistance:DC300V 10M Ω (Min)
Conduction resistance 5 Ω (Max)
- 3:PASS HD-TV TEST:4K*2K@60HZ

ITEM	L	T
SM-CHDMI2-2	2M	30MM
SM-CHDMI2-3	3M	45MM

PIN OUT

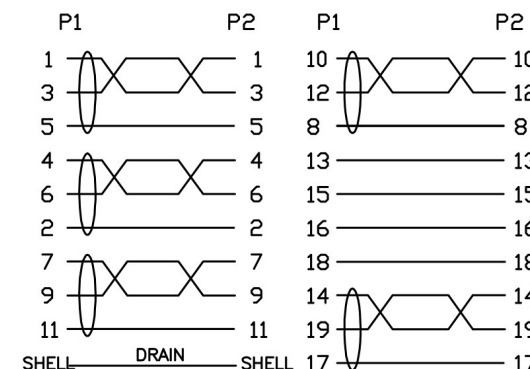

④	OUT-MOLDED	BLACK 45P PVC;	8	G	DRAWING		APPROVED		DATE		HDMI2.0 M/M FLEXIBLE CABLE	
③	INNER-MOLDED	LDPE;	2	G	Edition 1.0	Sheet 1/1	UNIT (MM)		Scale FREE		PART NO.	SM-CHD
②	CONN	HDMI A MALE ,GOLD PLATED PIN&SHELL;	2	PCS	TOLERANCE		.X: .,XX:		ANGLE:		RoHS COMPLIANT DESlink	
①	CABLE	(30AWG*1P+D+FAM)*5C+30AWG*4C+ADB, FLEXIBLE PVC JACKET, BLACK COLOR OD:6.0MM	L+/-T	MM	CUSTOMER							
NO.	MATERIAL	DESCRIPTION	QTY	UNIT								

1 2 3 4 5 6 7 8 9 10